McCall, Idaho

Welcome to the Mission Street South City Limits to Deinhard Lane Virtual Public Hearing

Project Sponsor: City of McCall
Project Administrator: Local Highway Technical Assistance Council (LHTAC)

This project is funded through Idaho Transporation Department Reimbursable Agreement with Local Match as part of STP Rural Federal Aid Program, administered by Local Highway Technical Assistance Council (LHTAC).

FORSGREN Associates Inc

lhtact2

BIONOMICS

Project Team

Local Sponsor: City of McCall

Project Administrator: Wayne Herbel, Local Highway Technical Assistance Council (LHTAC)

Design Consultant Project Manager: Stephen Waldinger, Forsgren Associates, Inc

Public Involvement Sub-Consultant: Sarah Beardsley, Bionomics

Mission Street
South City Limits to Deinhard Lane

The City of McCall is designing improvements to Mission St. from South City Limits to the intersection of Deinhard Lane.

The existing roadway has begun deteriorating in the form of potholes, cracking, and broken edges.

Reconstructing the road will improve safety, driving surface, roadway drainage, and bicycle and pedestrian facilities.

Construction is anticipated to begin 2027.

Design Details

The project will include a detached multi-modal pathway along a segment of Mission St. to connect a missing section of North Valley Rail Trail System from southern city limits to a multi-modal pathway at Jacob Street. **Other Improvements will include:**

- Mission Street will be rehabilitated and repaved throughout the length of the project.
- New 10' wide pathways will be constructed from South City Limits to Jacob Street.
- Construct roadside swales to help with stormwater conveyance, snow storage capacity, and access management.
- 4' bicycle lanes will be constructed from Jacob Street to Deinhard Lane.
- Improve entrance to future Riverfront Park.

Project Location & Limits

- Located on Mission Street from South City Limits (just south of Smokejumper Base) to Deinhard Lane.
- The length of the project is approximately 0.6 miles.
- Generally, the road runs south-north between the North Fork Payette River and SH-55, west of the City of McCall Airport.

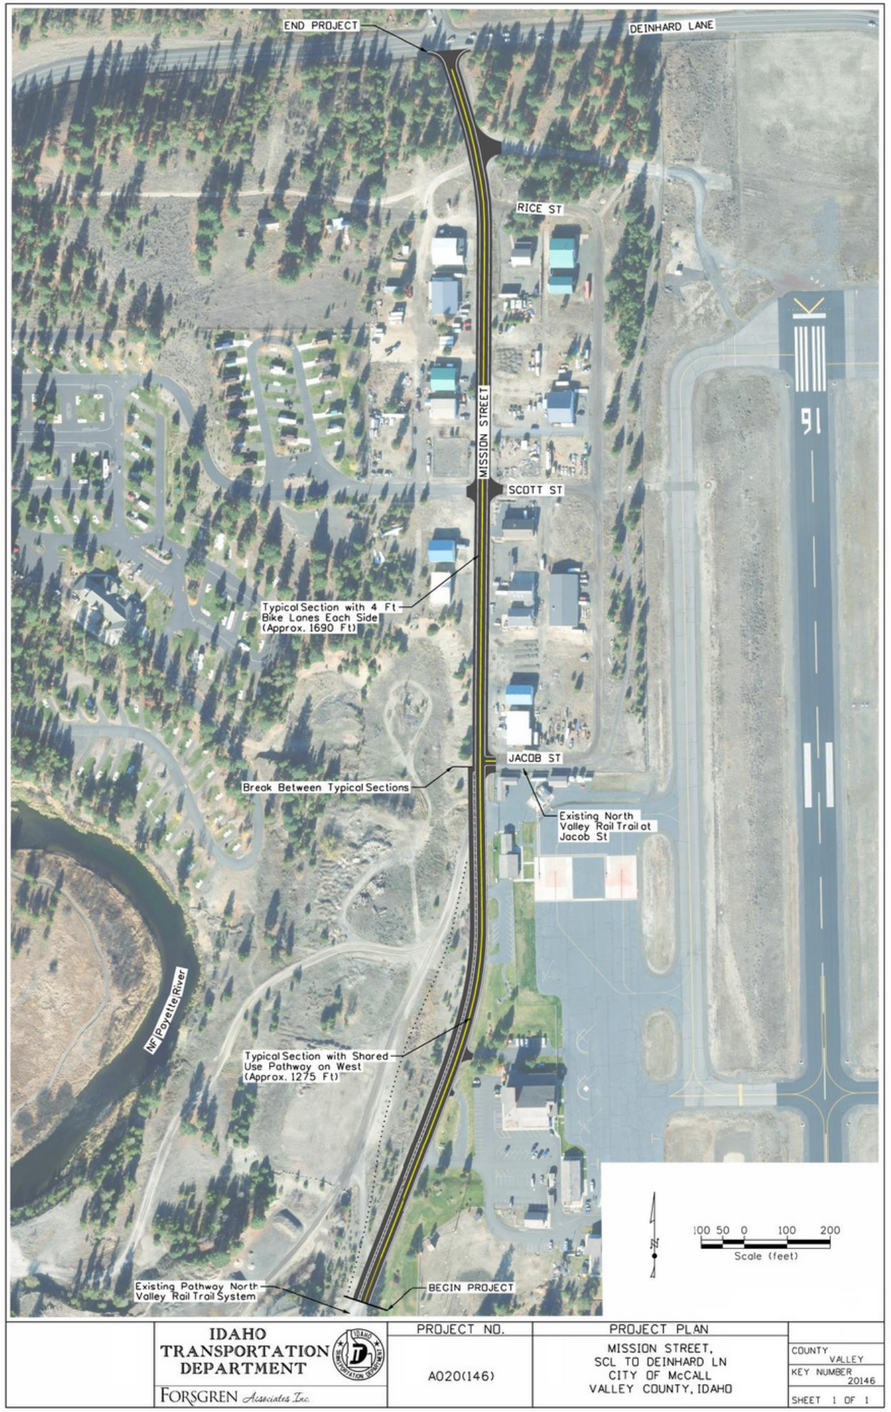

Vicinity Map

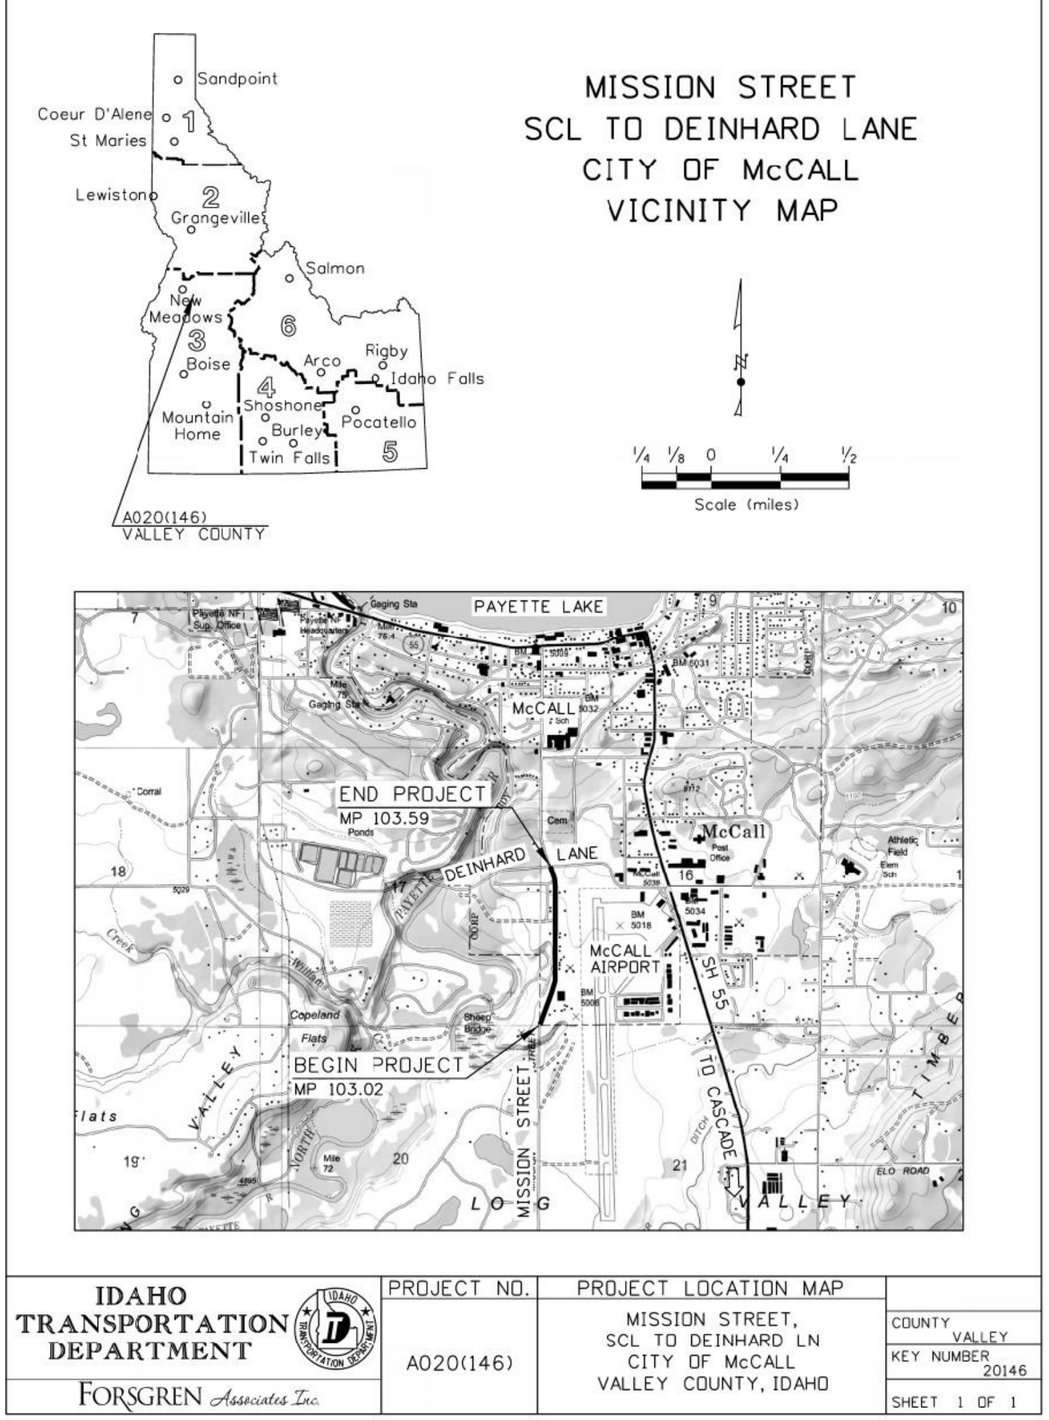

IDAHO TRANSPORTATION DEPARTMENT	PROJECT NO.	PROJECT LOCATION MAP	
FORSGREN Associates Inc.	A020(146)	MISSION STREET, SCL TO DEINHARD LN CITY OF McCALL VALLEY COUNTY, IDAHO	COUNTY VALLEY KEY NUMBER 20146 SHEET 1 OF 1

Primary Improvements & Impacts

Improvements:

- Rehabilitate and repave Mission Street throughout length of project.
- Construct new 10’ wide paved pathway from South City Limits to Jacob Street.
  - → This will connect the missing link in the North Valley Rail Trail system.
- Construct 4’ wide bicycle lanes from Jacob Street to Deinhard Lane.
- Construct roadside swales to help with stormwater conveyance, snow storage capacity, and access management.

Impacts:

- Mission Street and business access will remain open throughout construction.
- Reduced access points to properties along Mission Street.
- Construction traffic to be closed in one direction. Flaggers and temporary signals are anticipated to control construction traffic.

Project Funding

- This project is funded through Idaho Transportation Department Reimbursable Agreement with Local Match as part of STP Rural Federal Aid Program, administered by Local Highway Technical Assistance Council (LHTAC).

- The City of McCall (Local Sponsor) responsible for 7.34% match of project costs. The City's share of the project is utilizing funds gained through the Local Option Tax (LOT).

Project Timeline

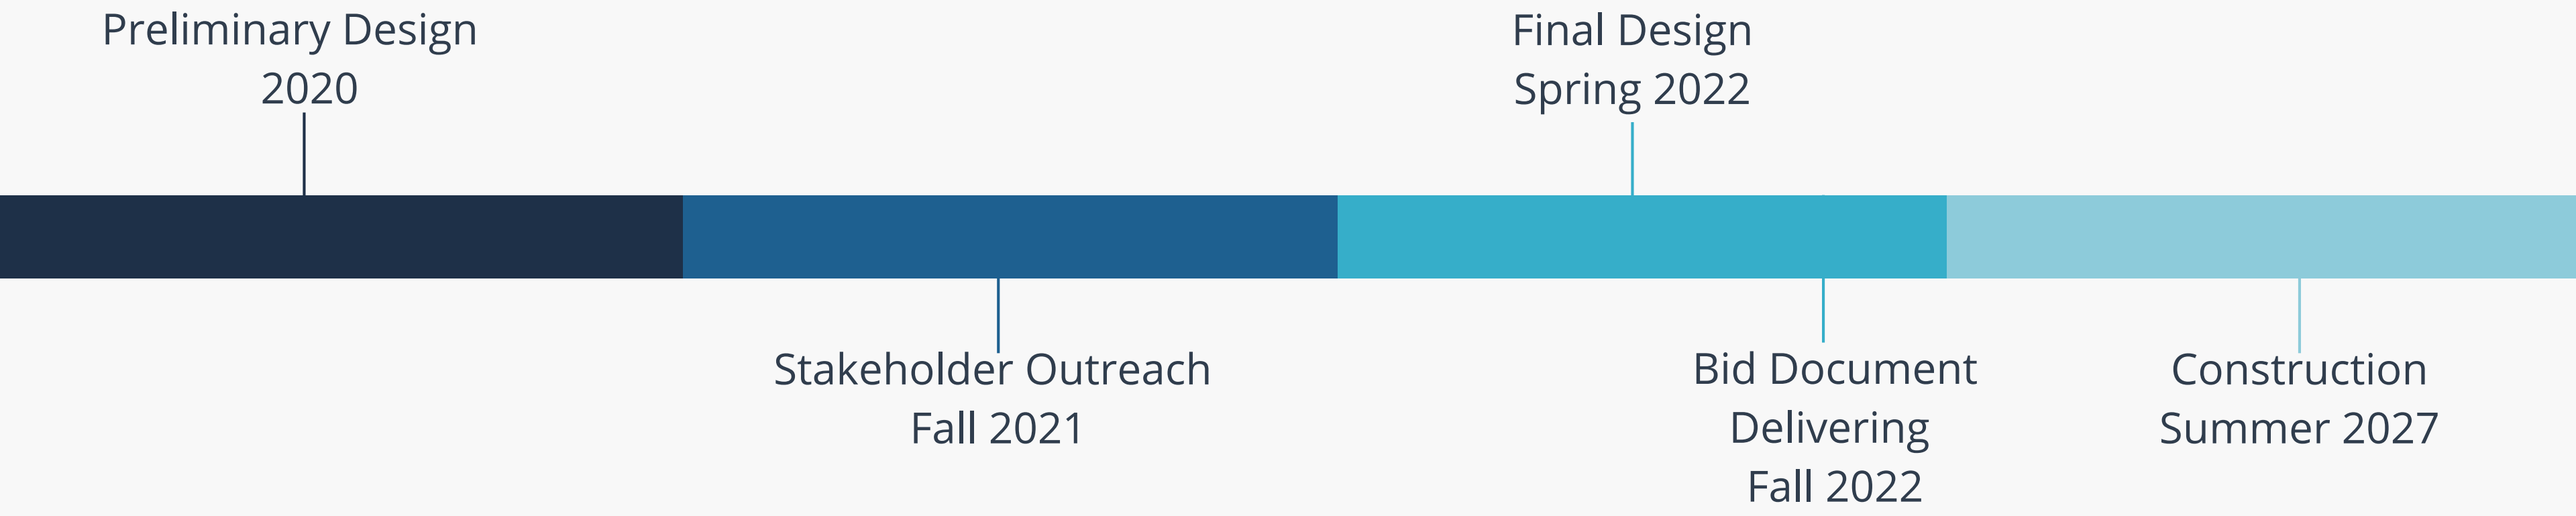

Please note: all project timeline dates are tentative

South City Limits to Jacob Street

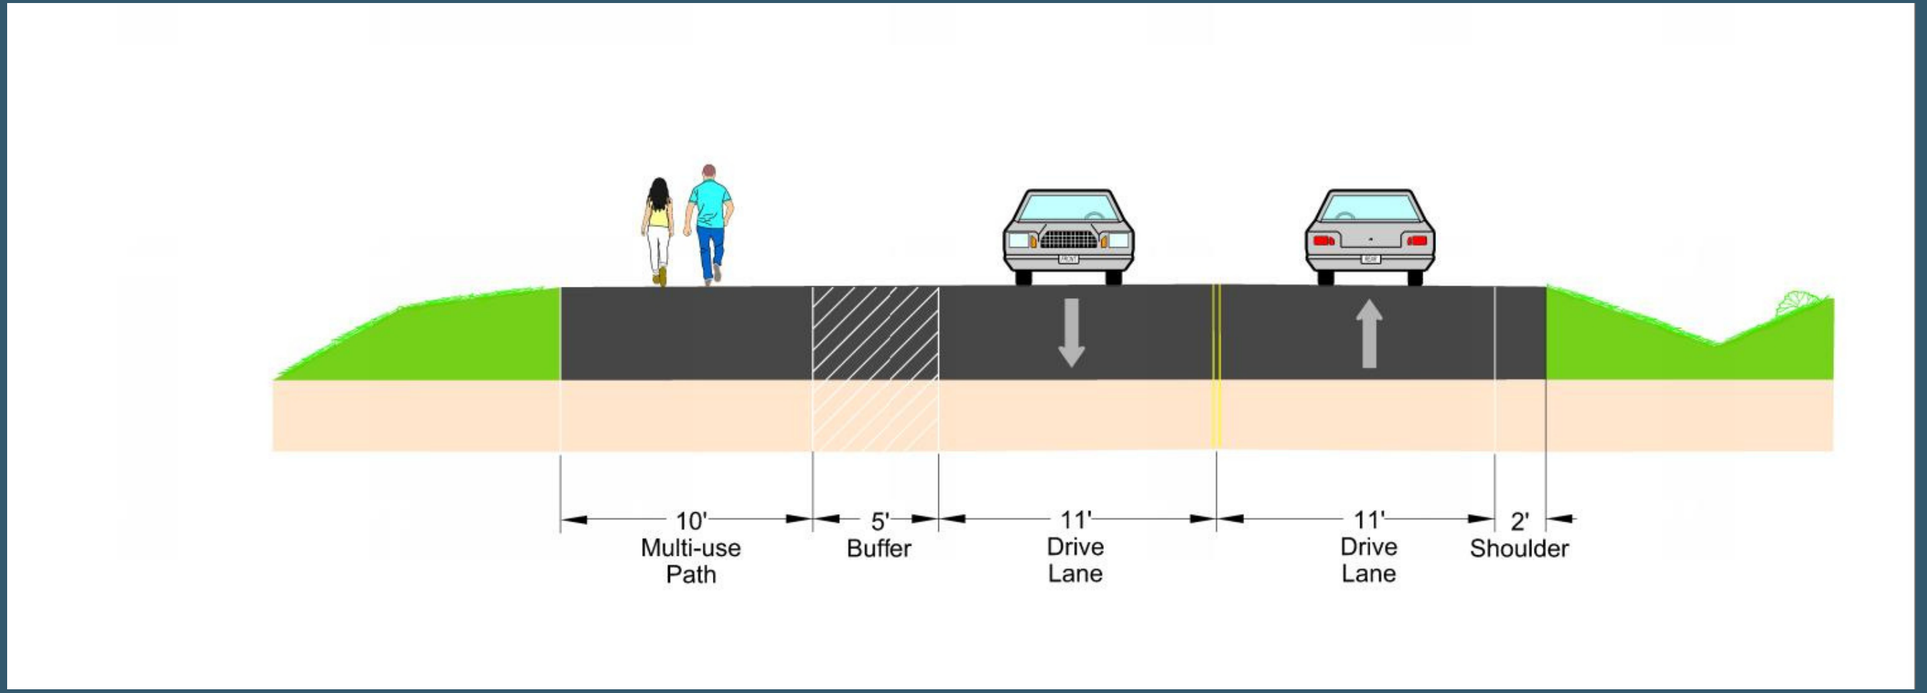

Jacob Street to Deinhard Lane

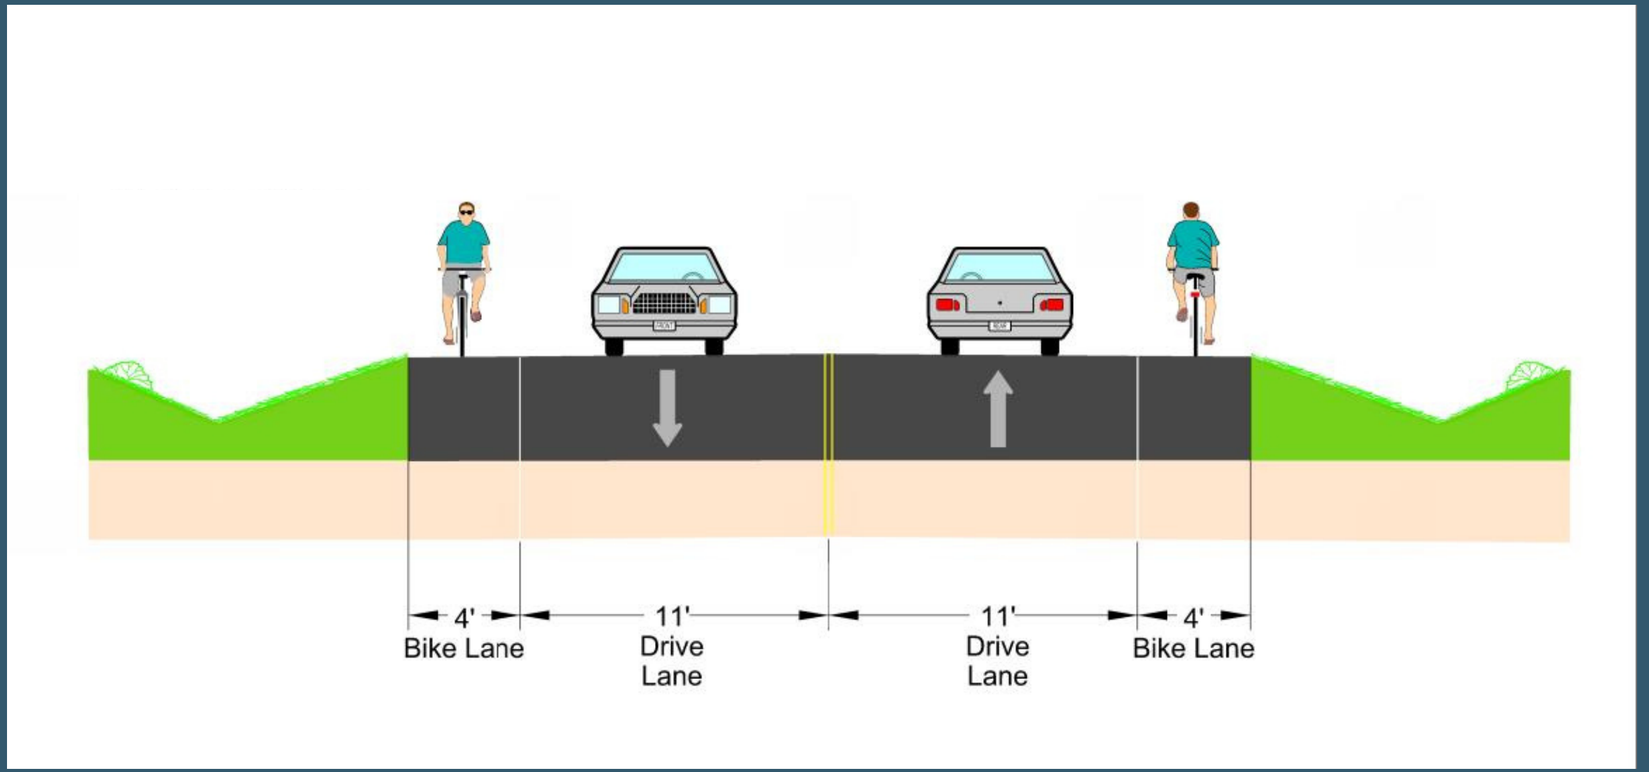

We value your input.

If you would like to provide a verbal testimony about this project please contact Sarah Beardsley at Bionomics by September 12, 2021

Phone: **(208) 939-1022**

E-mail: **sarahb@bionom.com**

Please note that all testimonies will be recorded for documentation purposes.